





## Minex

Electrical submersible drainage pump



60 Hz	1-ph 115V	1-ph 230V	3-ph
Discharge connection	2"	2"	2"
Rated power $P_2$ [kW/HP]	1.3 / 1.8	1.5 / 2.0	1.4 / 1.9
Max. power consumption $P_1$ [kW]	1.7	1.8	1.8
Shaft speed [r.p.m.]	3415	3460	3355
Rated current at 115V	15 A	-	-
Rated current at 230V	-	8.2 A	5.2 A
Rated current at 460V / 575V	-	-	2.6 A / 2.1 A
Solids passage [mm/inch]	7.5 / 0.3	7.5 / 0.3	7.5 / 0.3
Height [mm/inch]	616 / 24.25	646 / 25.5	616 / 24.25
Diameter [mm/inch]	200 / 7.9	200 / 7.9	200 / 7.9
Weight [kg/lbs]	21.5 / 47.5	25 / 55	21.5 / 47.5

Other voltages on request

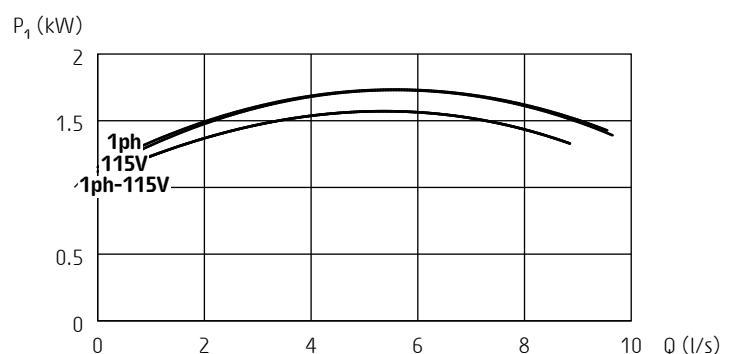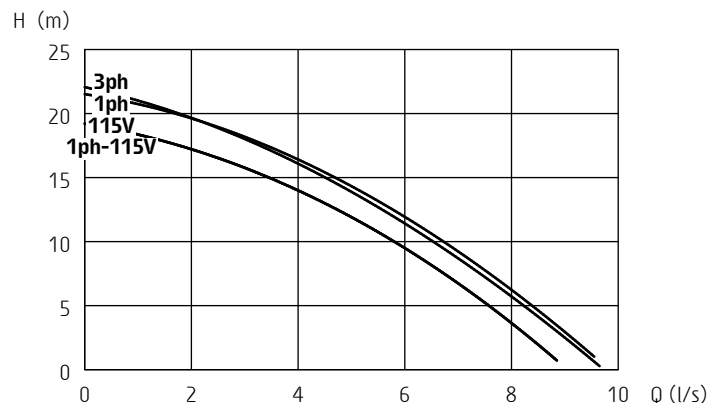

ISO 9906/A

### Classification

Electrical submersible drainage pump  
Protection class: IP 68

### Electrical motor

All versions: Squirrel cage induction motor  
1-phase 230V: With built in start and run capacitor  
1-phase 115V: With external start and run capacitor  
Insulation class: F (IEC 85)

### Motor protection

1-phase: Temperature guard with a thermal contact in stator opening temperature 125°C (257°F), air valve  
3-phase: Phase sequence control, phase failure guard, temperature guard with thermal contacts in the stator opening temperature 125°C (257°F) (= SMART system), air valve

### Cable - SubCab

1-phase: 3G1,5mm<sup>2</sup>, 20 m (66 ft) / 14AWG/3, 53 ft  
3-phase: 4G1,5mm<sup>2</sup>, 20 m (66 ft) / 14AWG/4, 53 ft

### Limitations

Max. submersion depth: 20 m (66 ft)  
Max. liquid temperature: 40 °C (104 °F)  
Allowed pH range: 5 - 8  
Maximum liquid density: 1100 kg/m<sup>3</sup> (68 lbs/ft<sup>3</sup>)

### Shaft seals

Cartridge seal: pre-assembled double mechanical seal running in an oil compartment  
Material lower seal: *silicon carbide - silicon carbide*  
Material upper seal: *tungsten carbide - aluminium oxide*

### Bearings

Ball bearings with C3 clearance

### Discharge connection

2" hose, ISO-G or NPT

### Materials

Casted parts: *Aluminium*  
Outer casing: *Stainless steel*  
Motor shaft: *Stainless steel*  
Impeller: *Hard-Iron™*  
Diffusers: *Nitrile rubber*  
Screws and nuts: *Stainless steel*  
O-rings: *Nitrile rubber*

### Accessories

Float switch  
Zinc anodes  
Low suction collar  
Pump raft

Distributed in Colombia by:

Specifications can be changed without notice